△		
△		
△		

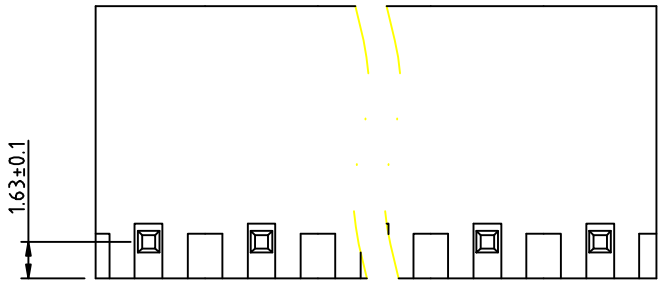

Technical Data:
Material;

- Solder Pin: Brass with Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating: 250VAC
- Current rating: 15A.
- Insulation resistance: 5000MΩ at DC 1000V
- Withstanding Voltage: AC 2000V(1min)

Mechanical:

- Using temperature Range: -33°C to +120°C
- Soldering temperature:+250°,5seconds Max.

Safety approvol deta:

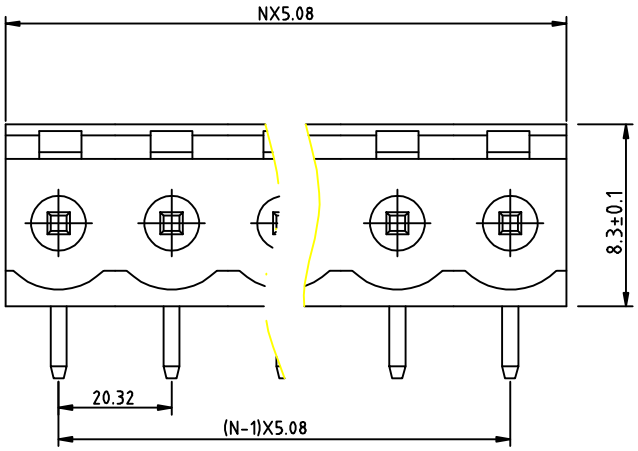

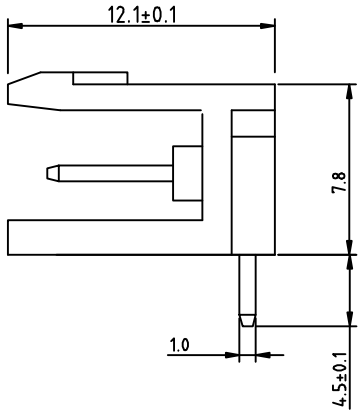

N=Number of contacts

P.C.B. LAYOUT

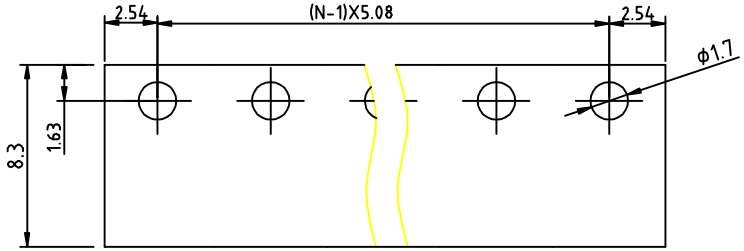

杰科电子有限公司

JIE KE ELECTRONICS CO., LTD.

PART. NAME: JK2EDGR-508				TITLE:	
PART. NO.:				DWG NAME:	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY	CUSTOM NO.:	Toleance
岑杰				UNITS: mm	x. ±0.50
				SCALE: 4/1	x.x ±0.30
				REVISION: B2	x.xx ±0.10
					xx° ±1°